

Method and apparatus for forming material layers from atomic gasses

Patent number: TW479312
Publication date: 2002-03-11
Inventor: YIEH ELLIE (US); XIA LI-QUN (CN)
Applicant: APPLIED MATERIALS INC (US)
Classification:
- **International:** H01L21/76
- **European:** C23C16/452; C30B25/02; C30B25/08; H01L21/28E2C2; H01L21/314B1; H01L21/316C2B2
Application number: TW20000102451 20000214
Priority number(s): US19990251701 19990217


Also published as:

EP1030352 (A2)
US2001052323 (A1)
JP2000311893 (A)
EP1030352 (A3)

Report a data error here

Abstract of TW479312

A method of forming material layers on a substrate using atomic gas is provided. A substrate is heated to an elevated temperature and is exposed to an atomic gas. The atomic gas reacts at a surface of the substrate to form a material layer thereon. The source of atomic gas preferably comprises a molecular gas source operatively coupled to a remote microwave plasma system that dissociates the molecular gas into highly reactive atomic gas. Gate quality silicon dioxide, oxynitride and silicon nitride may be formed by the dissociation of O₂, O₂ and N₂ or NH₃, and N₂ or NH₃, respectively, at reduced temperatures (e.g., about 600-650 DEG C). Because of the reduced formation temperatures, a uniform heating mechanism such as a ceramic heater may be employed for substrate heating so that a more uniformly-thick material layer results. To reduce recombination of gas atoms into molecular gas, the path length between the atomic gas source and the substrate is reduced, or an inert gas may be used to dilute the atomic gas so as to spatially separate gas atoms. A portion of the path between the atomic gas source and the substrate also may be coated with a protective coating to prevent gas atom recombination.

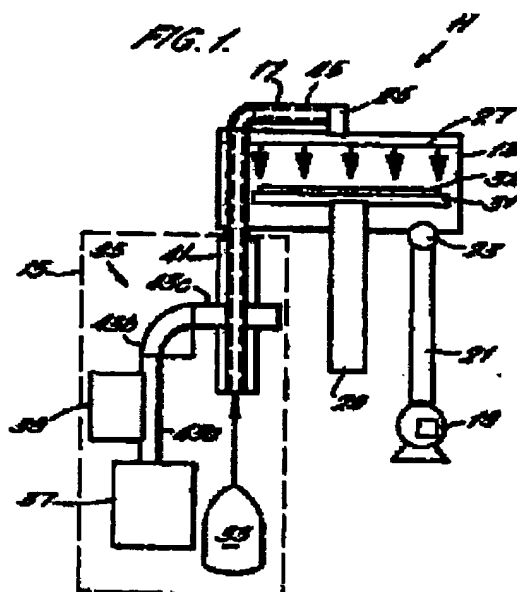

Data supplied from the esp@cenet database - Worldwide